

Data Encryption/Overwrite Operation Guide



Introduction

This Setup Guide explains the procedures for installing and operating the Data Encryption/Overwrite Functions (hereinafter called Security Functions) and the procedure for system initialization.

Organization administrators should read and understand this manual.

- Nominate a reliable person for the machine administrator when installing the security functions.
- Sufficiently supervise the nominated administrator so that it can observe the security policy and operation rules at the organization to which it belongs and properly operate the machine in accordance with the Operation Guide of the product.
- Sufficiently supervise the general users so that they can operate the machine while observing the security policy and operation rules at the organization to which they belong.

■ Instructions for General Users (for Both General Users and Administrators)

- Security Functions 2
- Touch Panel Display after the Security Functions are Installed 4

■ Instructions for Administrators (for Those in Charge of Installation and Operation of the Security Functions)

- Installing the Security Functions 5
- Changing Security Functions 13
- System Initialization 15
- Warning Message 16
- Disposal 16
- Appendix 17

Instructions for General Users (for Both General Users and Administrators)

Security Functions

The security functions enable overwriting and encryption.

NOTE: If you install the security functions, *Running security function...* appears when the machine starts up and it may take a while.

Overwriting

Multi-functional products (MFPs) temporarily store the data of scanned originals and print jobs, as well as other data stored by users, on the hard disk or in FAX memory, and the job is output from that data. As the data storage areas used for such data remain unchanged on the hard disk or in FAX memory until they are overwritten by other data, the data stored in these areas is potentially restorable using special tools.

The security functions delete and overwrite (hereinafter collectively referred to as *overwrite(s)*) the unnecessary data storage area used for the output data or deleted data to ensure that data cannot be restored.

Overwriting is performed automatically, without user intervention.

CAUTION: When you cancel a job, the machine immediately starts overwriting the data that was stored on the hard disk/SSD or in FAX memory.

Overwrite Methods

Changing the data overwrite method is available, when a hard disk is installed. There are two overwrite methods, which can be switched at any time.

Once Overwrite Method

The 1-time overwrite method overwrites unneeded data areas (in the case of overwriting) or all the data areas (in the case of system initialization) with specific numbers to prevent data restoration.

3-time Overwrite Method (A)

The 3-time overwrite method complies with DoD 5220.22-M, and overwrites unneeded data areas of the hard disk (in the case of overwriting) or all the data areas (in the case of system initialization) with specific numbers, their complements, and random numbers to prevent data restoration. Data restoration is not possible even through a sophisticated restoration technique.

The 3-time Overwrite Method (A) may take more time than the 1-time Overwrite Method.

NOTE: For SSD and FAX memory, the method used is Once Overwrite.

Encryption


MFPs store the data of scanned originals and other data stored by users in the hard disk/SSD. It means the data could be possibly leaked or tampered with if the hard disk/SSD is stolen.

The security functions encrypt data before storing it in the hard disk/SSD. It guarantees higher security because no data cannot be decoded by ordinary output or operations.

Encryption is automatically performed and no special procedure is required.

CAUTION: Encryption helps enhance security. However, the data stored in the Document Box can be decoded by ordinary operations. Do not store any strictly confidential data in the Document Box.


Security Functions

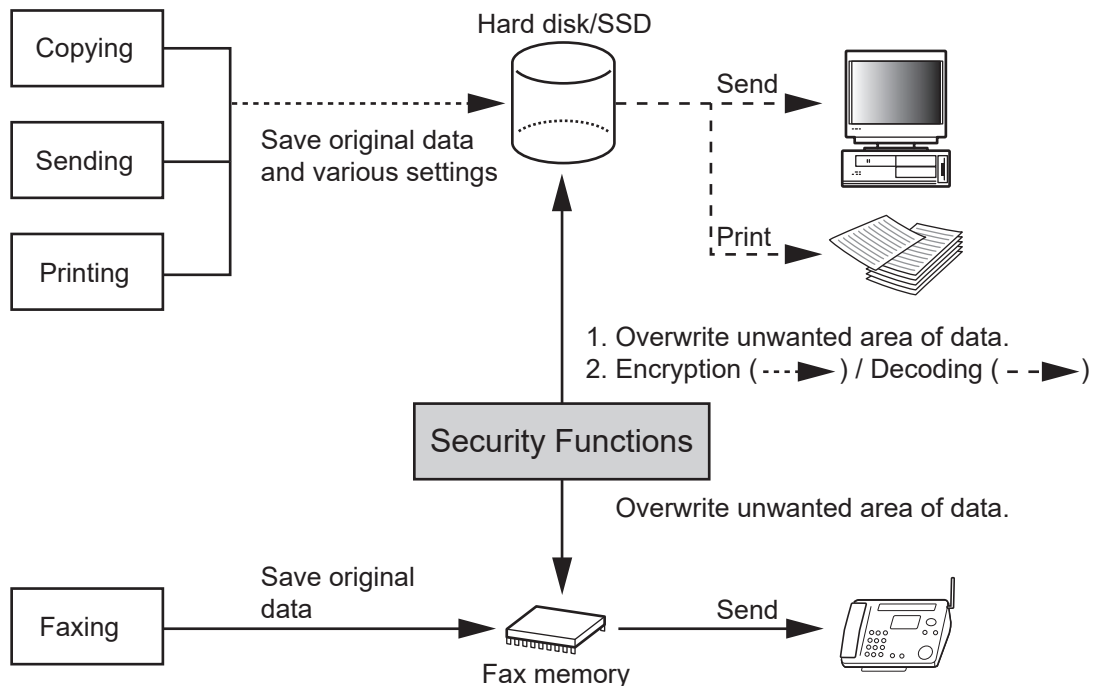

- If the security functions are introduced while the hard disk and SSD are installed in the machine, the destination where data received by FAX is to be saved is changed from SSD to hard disk. If you want to change the destination to SSD, contact your dealer or service technician.

Touch Panel Display after the Security Functions are Installed

Hard Disk Icon Display

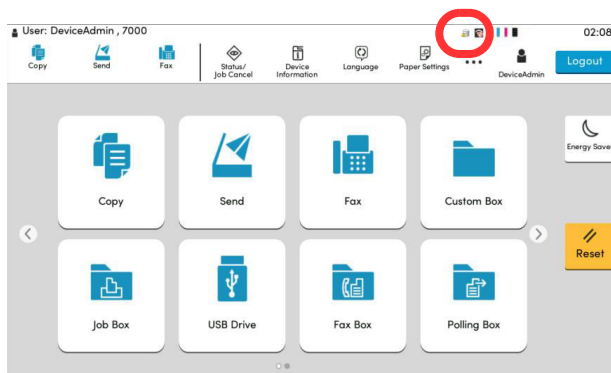

In Security Mode, the security functions have been properly installed and is running. The hard disk icon appears on the top right side of the touch panel in Security Mode.

NOTE: If the hard disk icon does not appear on the normal screen, it is possible that the Security Mode is not ON. Call service.

The hard disk icon display changes as follows during overwriting

The table below shows the icons displayed and their descriptions.

Icon displayed	Description
	There is unneeded data on the hard disk/SSD or in FAX memory.
	Overwriting the unwanted data
	The unwanted data is overwritten.

CAUTION: Do not turn the power switch off while is displayed. Risk of damage to the hard disk/SSD or FAX memory.

NOTE: If you turn the machine off at the power switch during overwriting, data may not be overwritten completely from the hard disk. Turn the machine back on at the power switch. Overwriting automatically resumes. If you accidentally turn the main power switch off during overwriting or initialization, the hard disk icon might not switch to the second icon shown above. This would be caused by a possible crash or failed overwriting of the data to be overwritten. This will not affect subsequent overwriting processes. However, hard disk initialization is recommended so as to return to normal stable operations. (Initialization should be performed by the administrator following the steps in *System Initialization on page 15.*)

Instructions for Administrators (for Those in Charge of Installation and Operations of the Security Functions)

If any kind of problem occurs in the installation or use of the security functions, contact your dealer or service technician.

Installing the Security Functions

The Security Functions Contents

The security functions package includes:

- License Certificate
- Installation Guide (for service personnel)
- Notice

In case of the standard specification, there will be no bundled items included.

Before Installation

- Make sure that the service representative must be a person who belongs to the supplying company.
- Install the machine in a safe location with controlled access, and unauthorized access to the machine can be prevented.
- The hard disk/SSD will be initialized during installation of the security functions. This means that the data stored in the hard disk will be all overwritten. Special attention should be given if you install the security functions on the MFP currently used.
- The network to which the machine is hooked up must be protected by a firewall to prevent extraneous attacks.
- The Repeat Copy function will be unavailable after the installation.
- [Adjustment/Maintenance] -> [Restart/Initialization] -> [System Initialization] will not be displayed in the *System Menu* after the installation.
- When installing the security functions, change the machine settings as follows.

Item			Value
Job Accounting/ Authentication	User Login Setting	Add/Edit Local User	Change the administrator password.
Device Settings	Date/Timer	Date and Time	Set the date and time.

- If the security functions are introduced while the hard disk and SSD are installed in the machine, the destination where data received by FAX is to be saved is changed from SSD to hard disk. If you want to change the destination to SSD, contact your dealer or service technician.

Installation

Installation of the security function is performed by the service person or the administrator. The service person or the administrator should log in the system menu to enter the encryption code.

Encryption Code

An encryption code of 8 alphanumeric characters (0 to 9, A to Z, a to z) to encrypt data needs to be entered. By default, the code is set *00000000*.

As an encryption key is then created from this code, it is safe enough to continue using the default code.

CAUTION: Be sure to remember and securely manage the encryption code you entered. If you need to enter the encryption code again for some reason and you do not enter the same encryption code, all the data stored on the hard disk/SDD will be overwritten as a security precaution.

Installation Procedure

Use the procedure below to select the interface.

- 1 Press the [Home] key.
- 2 Press [...] → [System Menu] → [Add/Delete Application].
- 3 Press [Optional Function List] of *Optional Function*.


If user login is disabled, the user authentication screen appears. Enter your login user name and password and then press [Login]. For this, you need to log in with administrator privileges. Refer to the machine's Operation Guide for the default login user name and password.

- 4 The optional function screen is displayed. Select *Data Encryption/Overwrite* and press [Activate].
- 5 This function will be activated. The data saved in the large capacity storage will be deleted and the storage will be formatted and encrypted. If there is no problem, press [Yes].
- 6 Turn the power switch on again following to the indication in the panel screen.
- 7 The screen for entering the encryption code is displayed.

To change the encryption code, erase the "00000000" and then enter the 8-digit alphanumeric encryption code (0 to 9, A to Z, a to z) and press [OK]. Hard disk/SSD formatting begins.

If the encryption code is not changed, press [OK]. Hard disk/SSD formatting begins.

- 8 When formatting finishes, follow the on screen instructions to turn the Power Switch off and on again.
- 9 After the opening screen is displayed, confirm that a hard disk icon (Overwritten completion icon of unnecessary data in the hard disk) is shown in the top right corner of the screen.

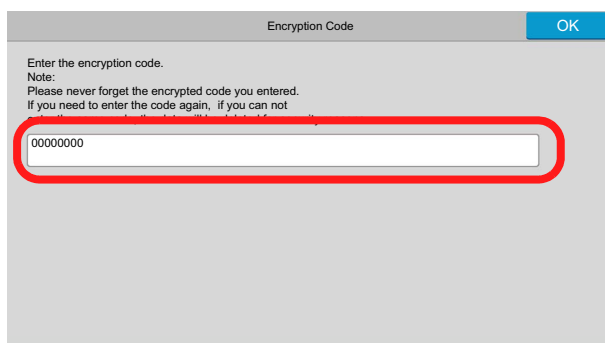

After Installation

Change the machine setting as follows to securely operate it. If the system in the machine is initialized, it returns to the settings before installation, so make changes in the same way. If you allow service personnel to conduct maintenance operations, confirm the set values.

Items changed in Command Center RX

Item					Value		
Device Settings	Energy Saver/Timer	Energy Saver/Timer Settings		Timer Settings	Auto Panel Reset	On	
					Panel Reset Timer	Setting any value	
	System	System	Error Settings	Continue or Cancel Error Job	Job Owner Only		
Function Settings	Printer	Printer Settings	General		Remote Printing	Prohibit	
			Google Cloud Print Settings (Select [Settings])	Privet(Cloud Device Local Discovery Protocol and API)	Local Discovery	Off	
					Local Print	Off	
	FAX/i-FAX	FAX/i-FAX Settings	Fax Settings	Remote Settings	FAX Remote Diagnostics	Off	
	RX/Forward Rules	Settings	RX/Forward Rules Settings		RX/Forward Rules	Rule for All RX	
					Forward Settings	Forwarding	Off
					Storing in FAX Box Settings	Storing in FAX Box	On
FAX Box	Any FAX Box						

Item				Value				
Network Settings	TCP/IP	TCP/IP Settings		Bonjour Settings	Bonjour	Off		
				Allowed IPSec Rules* ("Settings" selection of any of Rule No.)		IPSec Settings	IPSec	On
						Restriction	Allowed	
		Policy	Rule			On		
		IP Address		Key Management Type	IKEv1			
				Encapsulation Mode	Transport			
				IP Version	IPv4			
		Authentication		Local Side	IP Address (IPv4)	IP Address of the destination terminal		
				Subnet Mask	Setting any value			
				Authentication Type	Pre-shared Key			
		Key Exchange (IKE phase1)		Pre-shared Key	Setting any value			
				Mode	Main mode			
				Hash	MD5:Disable, SHA1:Disable, SHA-256:Enable, SHA-384:Enable, SHA-512:Enable			
		Data Protection (IKE phase2)		Diffie-Hellman Group	Select one from following option. modp2048(14), modp4096(16), modp6144(17), modp8192(18), ecp256(19), ecp384(20), ecp521(21), modp1024s160(22), modp2048s224(23), modp2048s256(24)			
				Protocol	ESP			
				Hash	MD5:Disable, SHA1:Disable, SHA-256:Enable, SHA-384:Enable, SHA-512:Enable, AES-XCBC: Setting any value, AES-GCM-128:Enable, AES-GCM-192:Enable, AES-GCM-256:Enable, AES-GMAC128: Setting any value, AES-GMAC-192: Setting any value, AES-GMAC-256: Setting any value			

Item			Value		
Network Settings	Protocol	Protocol Settings	Print Protocols	NetBEUI	Off
				LPD	Off
				FTP Server (Reception)	Off
				IPP	Off
				IPP over SSL	On
				IPP Authentication	Off
				Raw	Off
				WSD Print	Off
			Send Protocols	POP3 (E-mail RX)	Off
				SMTP (E-mail TX)	On
				FTP Client (Transmission)	On
				SMB	Off
				WSD Scan	Off
				DSM Scan	Off
				eSCL	Off
			Other Protocols	eSCL over SSL	Off
				SNMPv1/v2c	Off
				SNMPv3	Off
				HTTP	Off
				HTTPS	On
				Enhanced WSD	Off
				Enhanced WSD(SSL)	On
				LDAP	Off
				IEEE802.1X	Off
				LLTD	Off
				REST	Off
				REST over SSL	Off
			VNC(RFB)	Off	
			VNC(RFB) over SSL	Off	
			Enhanced VNC(RFB) over SSL	Off	

Item				Value		
Security Settings	Device Security	Device Security Settings	Display Status/Log		Display Jobs Detail Status	My Jobs Only
					Display Jobs Log	My Jobs Only
			Edit Restriction		Address Book	Administrator Only
					One Touch Key	Administrator Only
			Authentication Security Settings	Password Policy Settings	Password Policy	On
					Maximum password age	Setting any value
					Minimum password length	On 8 or more characters
					Password complexity	Setting any value
			User Account Lockout Settings	Lockout Policy	On	
				Number of Retries until Locked	Setting any value	
	Lockout Duration	Setting any value				
	Lockout Target	All				
	Network Security	Network Security Settings	Secure Protocol Settings	SSL		On
				Serverside Settings	TLS Version	SSL3.0/TLS1.0: Disable TLS1.1: Disable TLS1.2: Enable
					Effective Encryption	ARCFOUR: Disable, DES: Disable, 3DES: Enable, AES: Enable, AES-GCM: Setting any value
					HTTP Security	Secure Only (HTTPS)
					IPP Security	Secure Only (IPPS)
					Enhanced WSD Security	Secure Only (Enhanced WSD over SSL)
				Clientside Settings	TLS Version	SSL3.0/TLS1.0: Disable TLS1.1: Disable TLS1.2: Enable
					Effective Encryption	ARCFOUR: Disable, DES: Disable, 3DES: Enable, AES: Enable, AES-GCM: Setting any value
Certificate Verification					On	

Item				Value		
Management Settings	Authentication Settings	Settings	Authentication Settings	General	Authentication	Local Authentication
				Local Authorization Settings	Local Authorization	On
				Guest Authorization Settings	Guest Authorization	Off
				Simple Login Settings	Simple Login	Off
	History Settings	History Settings	Job Log History	Recipient E-mail Address	E-mail Address for the administrator of the machine	
				Auto Sending	On	
				Login History Settings	Login History	On
			Login History Settings	Recipient E-mail Address	E-mail Address for the administrator of the machine	
				Auto Sending	On	
				Device Log History Settings	Device Log History	On
			Device Log History Settings	Recipient E-mail Address	E-mail Address for the administrator of the machine	
				Auto Sending	On	
				Secure Communication Error Log History Settings	Secure Communication Error Log History	On
			Recipient E-mail Address		E-mail Address for the administrator of the machine	
			Auto Sending		On	

Items changed on the machine

Item			Value
System Menu	Security Settings	Security Level	Very High
	Function Settings	Internet Browser	Off

For the procedures for changing the settings, refer to the machine Operation Guide and Command Center RX User Guide.

After changing the settings, run [Software verification] in the system menu to verify that the machine operates correctly. Periodically perform [Software verification] after installation as well.

After installing the security functions, you can change the security password as well as the method for overwriting the entire hard disk.

Refer to *page 13* for the procedures.

The administrator of the machine should periodically store the histories, and check each history to make sure there was no unauthorized access or abnormal operation.

Grant regular users permission based on your company rules, and promptly delete any user accounts that stop being used due to retirement or other reasons.

IPsec setting

It is possible to protect data by enabling the IPsec function that encrypts the communication path.

Please note the following points when enabling the IPsec function.

- The value set by the IPsec rule has to be matched with the destination PC. Communication error occurs in case the setting does not match.
- IP address set by the IPsec rule has to be matched with the IP address of the SMTP server or FTP server which is set on the main unit.
- In case the setting does not match, data sent by mail or FTP can't be encrypted.
- Pre-shared key set by the IPsec rule has to be created by using the alphanumeric symbols of 8 digits or more which will not be easily guessed.

Changing Security Functions

Changing Security Password

Enter the security password to change security functions. You can customize the security password so that only the administrator can use the security functions.

Use the procedure below to change the security password.

- 1 Press the **[Home]** key.
- 2 Press [...] → [System Menu] → [Security Settings].
- 3 Press [Data Security] of *Device Security Settings*.

If user login is disabled, the user authentication screen appears. Enter your login user name and password and then press [Login]. For this, you need to log in with administrator privileges. Refer to the *machine's Operation Guide* for the default login user name and password.

- 4 Press [Hard Disk/SSD Initialization].
- 5 Enter the default security password, *000000*.
- 6 Press [Security Password].
- 7 For the "Password," enter a new security password with 6 to 16 alphanumeric characters and symbols.
- 8 For "Confirm Password," enter the same password again.
- 9 Press [OK].



The screenshot shows a dialog box titled "Security Password". At the top, there are three buttons: "Cancel", "Security Password", and "OK". Below the title bar, there are two text input fields. The first field is labeled "Password" and the second is labeled "Confirm Password". A red rectangular box is drawn around both input fields, indicating where the user should enter their new security password and confirm it.

CAUTION: Avoid any easy-to-guess numbers for the security password (e.g. 11111111 or 12345678).

Changing the Data Overwrite Method

The method used to overwrite data can be changed. Refer to *Overwriting on page 2* for details. Changing the data overwrite method is not available, when a hard disk is not installed.


NOTE: The overwrite methods are used both for overwriting and hard disk initialization, and cannot therefore be set individually.

Use the procedure below to select the interface.

- 1 Press the **[Home]** key.
- 2 Press [...] → [System Menu] → [Security Settings].
- 3 Press [Data Security] of *Device Security Settings*.

If user login is disabled, the user authentication screen appears. Enter your login user name and password and then press [Login]. For this, you need to log in with administrator privileges. Refer to the *machine's Operation Guide* for the default login user name and password.

- 4 Press [Hard Disk/SSD Initialization].
- 5 Enter the default security password, *000000*.
- 6 Press [Data Overwrite Method].
- 7 Press [3-time Overwrite (A)] (default) or [Once Overwrite].
- 8 Press [OK].

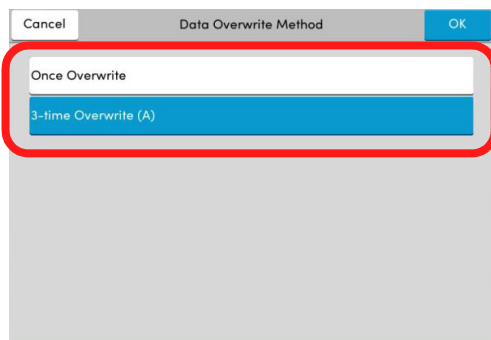

System Initialization

Overwrite all the data stored in the system when disposing of the machine.

CAUTION: If you accidentally turn the power switch off during initialization, the system might possibly crash or initialization might fail.


NOTE: If you accidentally turn the power switch off during initialization, turn the power switch on again. Initialization automatically restarts.

Use the procedure below to initialize the system.

- 1 Press the **[Home]** key.
- 2 Press [...] → [System Menu] → [Security Settings].
- 3 Press [Data Security] of *Device Security Settings*.

If user login is disabled, the user authentication screen appears. Enter your login user name and password and then press [Login]. For this, you need to log in with administrator privileges. Refer to the *machine's Operation Guide* for the default login user name and password.


- 4 Press [Hard Disk/SSD Initialization].
- 5 Enter the default security password, *000000*.
- 6 Press [System Initialization].
- 7 Press [Initialize] on the screen to confirm the initialization. Initialization starts.
- 8 When the screen appears to show initialization is completed, turn the power switch off and then on.

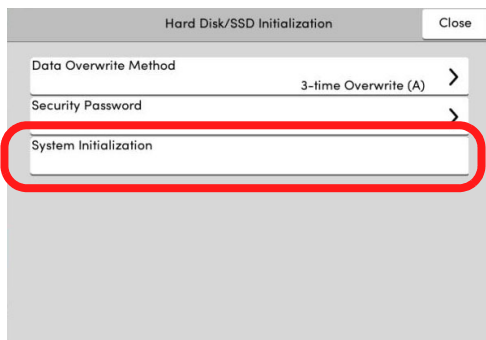

Warning Message

If the encryption code information of the machine has been lost for some reason, the screen shown here appears when the power is turned on.

Follow the steps below.

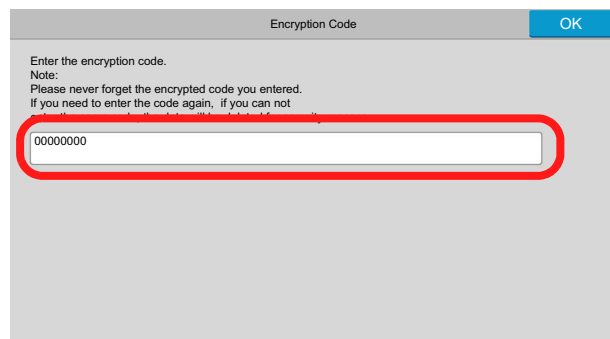

- 1 Enter the encryption code that was entered during the installation of the security functions.

CAUTION: Even though entering a different encryption code can also enable continuation of a job, this will overwrite all the data stored in the hard disk/SSD. Exercise extreme caution when entering an encryption code.

The encryption code is not the same as the security password.

- 2 Turn the power switch off and on.

Disposal

If the machine is unused and demolished, initialize the system of this product to erase the hard disk/SSD data and FAX memory.

If the machine is unused and demolished, obtain directions for disposal from the dealer (from which you purchased the machine) or your service representative.

Appendix

List of factory default settings

The default settings for security mode are shown below.

Items changed in Command Center RX

Item					Value	
Device Settings	Energy Saver/Timer	Energy Saver/Timer Settings		Timer Settings	Auto Panel Reset	On
					Panel Reset Timer	90 seconds
	System	System		Error Settings	Continue or Cancel Error Job	All users
Function Settings	Printer	Printer Settings	General		Remote Printing	Permit
			Google Cloud Print Settings (Select [Settings])	Privet(Cloud Device Local Discovery Protocol and API)	Local Discovery	On
					Local Print	On
	FAX/i-FAX	FAX/i-FAX Settings	Fax Settings	Remote Settings	FAX Remote Diagnostics	Off
	RX/Forward Rules	Settings	RX/Forward Rules Settings		RX/Forward Rules	Off
				Forward Settings	Forwarding	Off
					Forward Destination	No setting
				Storing in FAX Box Settings	Storing in FAX Box	Off
FAX Box	No setting					

Item				Value			
Network Settings	TCP/IP	TCP/IP Settings		Bonjour Settings	Bonjour	On	
				IPSec Settings		IPSec	Off
						Restriction	Allowed
		IPSec Rules ("Settings" selection of any of Rule No.)	Policy		Rule	Off	
					Key Management Type	IKEv1	
					Encapsulation Mode	Transport	
			IP Address		IP Version	IPv4	
					IP Address (IPv4)	No setting	
					Subnet Mask	No setting	
			Authentication	Local Side	Authentication Type	Pre-shared Key	
					Pre-shared Key	No setting	
			Key Exchange (IKE phase1)		Mode	Main Mode	
					Hash	MD5: Disable, SHA1: Enable, SHA-256: Enable, SHA-384: Enable, SHA-512: Enable, AES-XCBC: Disable	
					Encryption	3DES: Enable, AES-CBC-128: Enable, AESCBC-192: Enable, AESCBC-256: Enable, AESCBC-128: Enable, AESCBC-192: Enable, AESCBC-256: Enable	
					Diffie-Hellman Group	modp1024(2)	
					Lifetime (Time)	28800 seconds	

Item				Value	
Network Settings	TCP/IP	IPSec Rules ("Settings" selection of any of Rule No.)	Data Protection (IKE phase2)	Protocol	ESP
				Hash	MD5: Disable, SHA1: Enable, SHA-256: Enable, SHA-384: Enable, SHA-512: Enable, AES-XCBC: Disable, AES-GCM-128: Enable, AES-GCM-192: Enable, AES-GCM-256: Enable, AES-GMAC-128: Disable, AES-GMAC-192: Disable, AES-GMAC-256: Disable
				Encryption	3DES: Enable, AES-CBC-128: Enable, AES-CBC-192: Enable, AES-CBC-256: Enable, AES-GCM-128: Enable, AES-GCM-192: Enable, AES-GCM-256: Enable, AES-CTR: Disable
				PFS	Off
				Lifetime Measurement	Time & Data Size
				Lifetime (Time)	3600 seconds
				Lifetime (Data Size)	100000KB
				Extended Sequence Number	Off

Item			Value		
Network Settings	Protocol	Protocol Settings	Print Protocols	NetBEUI	On
			LPD	On	
			FTP Server (Reception)	On	
			IPP	Off	
			IPP over SSL	On	
			IPP Authentication	Off	
			Raw	On	
			WSD Print	On	
			POP3 (E-mail RX)	Off	
			Send Protocols	SMTP (E-mail TX)	Off
			FTP Client (Transmission)	On	
			SMB	On	
			WSD Scan	On	
			DSM Scan	Off	
			eSCL	On	
			eSCL over SSL	On	
			Other Protocols	SNMPv1/v2c	On
			SNMPv3	Off	
			HTTP	On	
			HTTPS	On	
			Enhanced WSD	On	
			Enhanced WSD(SSL)	On	
			LDAP	Off	
			IEEE802.1X	Off	
			LLTD	On	
			REST	On	
			REST over SSL	On	
			VNC(RFB)	Off	
			VNC(RFB) over SSL	Off	
			Enhanced VNC(RFB) over SSL	On	

Item					Value	
Security Settings	Device Security	Device Security Settings	Display Status/Log		Display Jobs Detail Status	Show All
					Display Jobs Log	Show All
			Edit Restriction		Address Book	Off
					One Touch Key	Off
			Authentication Security Settings	Password Policy Settings	Password Policy	Off
					Maximum password age	Off
					Minimum password length	Off
					Password complexity	No more than two consecutive identical char

Item					Value	
Security Settings	Device Security	Device Security Settings	Authentication Security Settings	User Account Lockout Settings	Lockout Policy	Off
					Number of Retries until Locked	3 times
					Lockout Duration	1 minute
					Lockout Target	Remote Login Only
	Network Security	Network Security Settings	Secure Protocol Settings	SSL		On
				Serverside Settings	TLS Version	SSL3.0/TLS1.0: Enable TLS1.1: Enable TLS1.2: Enable
					Effective Encryption	ARCFOUR: Enable, DES: Disable, 3DES: Enable, AES: Enable, AES-GCM: Disable
					HTTP Security	Secure Only (HTTPS)
					IPP Security	Secure Only (IPPS)
					Enhanced WSD Security	Secure Only (Enhanced WSD over SSL)
					Clientside Settings	TLS Version
				Effective Encryption		ARCFOUR: Enable, DES: Enable, 3DES: Enable, AES: Enable, AES-GCM: Disable
				Certificate Verification		On

Item				Value		
Management Settings	Authentication Settings	Settings	Authentication Settings	General	Authentication	Off
				Local Authorization Settings	Local Authorization	Off
				Guest Authorization Settings	Guest Authorization	Off
				Simple Login Settings	Simple Login	Off
	History Settings	History Settings	Job Log History	Recipient E-mail Address	No setting	
				Auto Sending	Off	
				Login History Settings	Login History	Off
			Device Log History Settings	Recipient E-mail Address	No setting	
				Auto Sending	Off	
				Secure Communication Error Log History Settings	Secure Communication Error Log History	Off
			Secure Communication Error Log History Settings	Recipient E-mail Address	No setting	
				Auto Sending	Off	

Items changed on the machine

Item			Value
System Menu	Security Settings	Security Level	High
	Function Settings	Internet Browser	Off

The initial value of the custom box

Item		Value
Owner		Local User
Permission		Private

Log information

The following settings and status regarding security are shown in the machine log.

- Event date and time
- Type of event
- Information of the log in user or the user who attempted to log in
- Event result (Success or fail)

Event to be displayed in the log

Log	Event
Job Logs	End job/Check job status/Change job/Cancel job
Login History	Success and fail of Log in/out
	User Account Lockout and release the block
Device Log History	Power On/Off
	Change the user information
	Change the date and time
	Change the settings of security function
Secure Communication Error Log History Settings	Display or delete Image data stored in Document Box
	TLS, IPsec communication error

